



Ultimate System 10 Bevelled Flush Sash Casement Technical Specification

JohnFREDERICKS

MANUFACTURERS OF

theultimate[®]
collection

PVC-u Profile

- System 10 70mm bevelled including Flush Sash
- Standard outer frame 56mm high / optional 72mm
- Full welded transoms and mullions
- Steel reinforced to manufacturers specification
- Variable bay poles available plus standard 90°
- Mitred internal bevelled beads (optional ovolo beads)

Colours

- Smooth White
- White W/grain
- Rosewood
- Rosewood on Smooth White
- Cherrywood
- Cherrywood on Smooth White
- Irish Oak
- Irish Oak on Smooth White
- Ice Cream W/grain
- Ice Cream W/grain on Smooth White
- 7016 Grey W/grain
- 7016 Grey W/grain on Smooth White
- 7016 Grey W/grain on White W/grain
- 7016 Grey Smooth
- 7016 Grey Smooth on Smooth White
- 7015 Grey W/grain on Smooth White
- Chartwell Green W/grain on Smooth White
- Black W/grain on Smooth White
- Agate Grey 7038 W/grain on Smooth White
- French Grey 7032 W/grain on Smooth White
- Sprayed to RAL colour of choice

Handles

- Standard – White key locking handle
- Optional Colours – Black, Chrome, Gold, Graphite, Bronze, Antique Black, Satin
- Monkey Tail or Tear Drop available in Antique Black, Chrome, Gold, Graphite
- False peg stays to match Monkey Tail or Tear Drop handles available in Antique Black, Chrome, Gold, Graphite

Locking and Hinge System

- Maco shootbolt-espag. 2 biparting cams, 2 or 4 roller cams (dependant on sash size), 2 shootbolt locks, 2 metal anti-jemmy hinge bolts. Yale high security fire escape/easy-clean hinges fitted as standard to all side-opening windows.
- Optional Tristay fire escape/easy-clean hinge with built in restrictor
- Optional Mega Hinge (used for triple glazed side hung sashes or extra wide sashes up to 900mm – maximum weight limits apply)

Glass Unit Options

- Standard – 28mm Double Glazed to U value 1.4
- (Black, White or Grey warm edge spacer bar)
- Optional 32mm Triple Glazed to U value 1.1 (bevelled bead only).

Glazing Options

- Clear or patterned glass | range of lead lite patterns
- Internal 18mm or 25mm Georgian bar
- Bevelled Ali-lock clip on Georgian bar inside and out (Ovolo option)

Ventilation



- When specified 2500/5000 trickle vents can be fitted to the top of outerframe only

Accreditations

- BS6375 Weather performance
- PAS24 Enhanced Security KM 36015

ULTIMATE SYSTEM 10 BEVELLED FLUSH CASEMENT - TYPICAL SECTIONS

Outward opening internally beaded | Bevelled profile | All measurements in mm

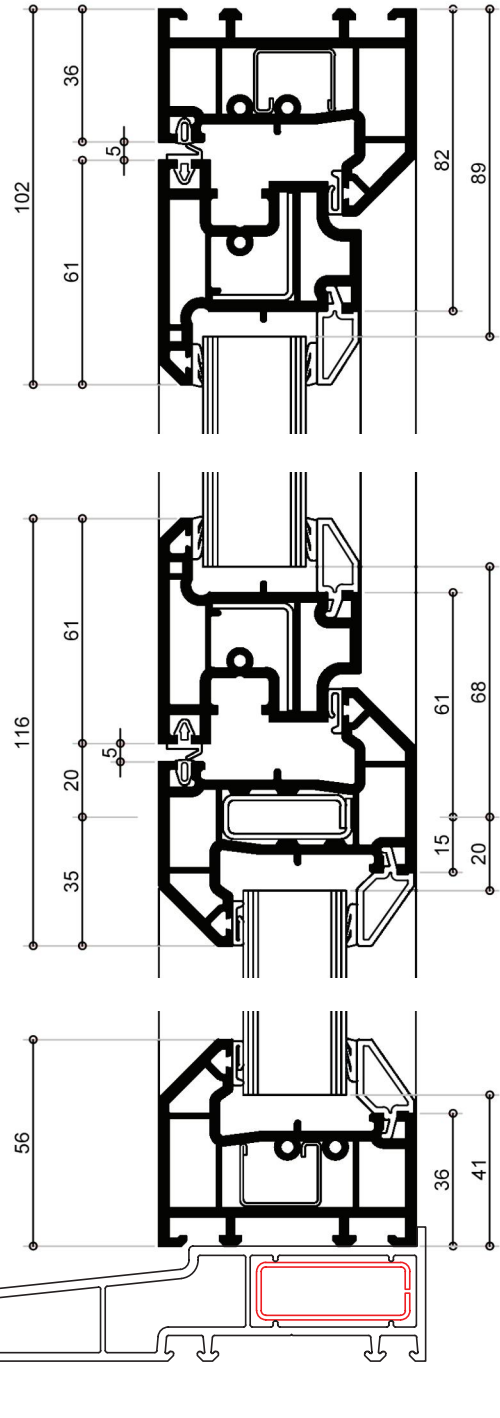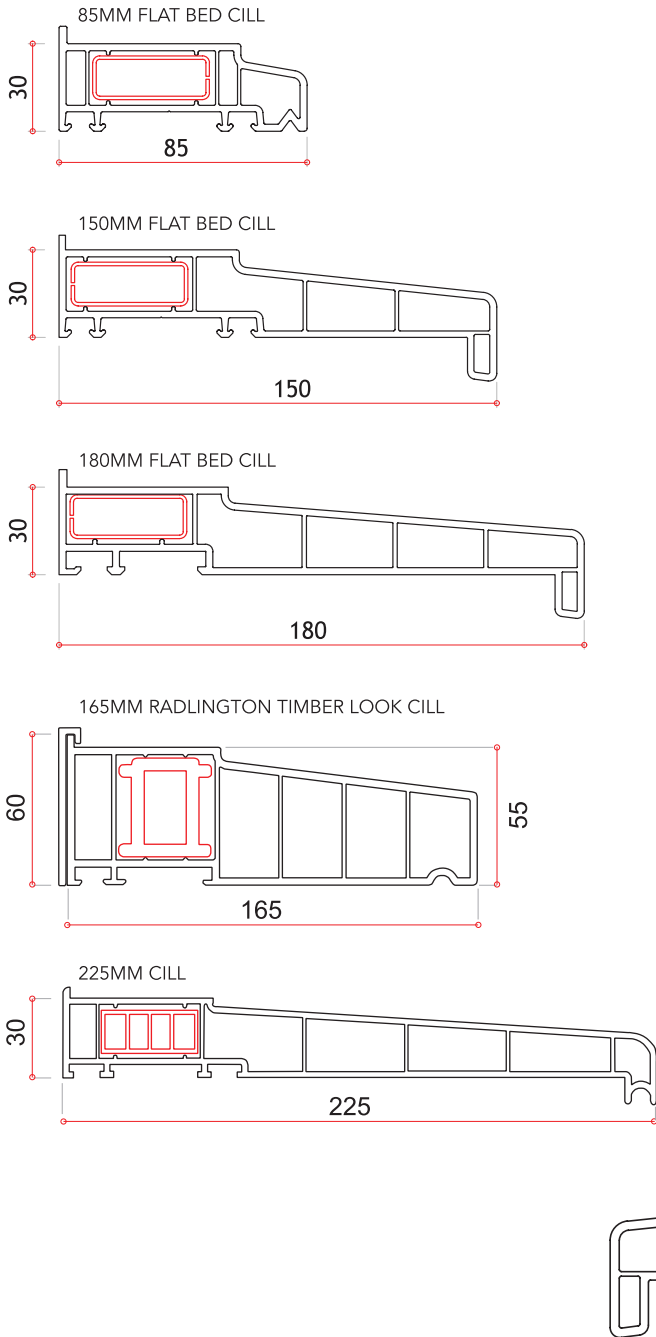

Side Hung Sash max width (Mull-Mull)	650mm	Top Hung Sash max width (Mull-Mull)	1250mm
Side Hung Sash max height (Mull-Mull)	1350mm	Top Hung Sash max height (Mull-Mull)	1250mm
		Minimum Fanlight depth (O/Frame-Trans)	329mm

Weight Restrictions

Standard hinges will be changed for heavy duty hinges when the weight of the sash exceeds the limitations of standard hinges.

Using Heavy Duty Hinges

Top Opener Max 1350mm wide x 1350mm high (50kgs)
Side opener Max 700mm wide x 1350mm high (24kgs)