


Technical information

For Liniar casement windows



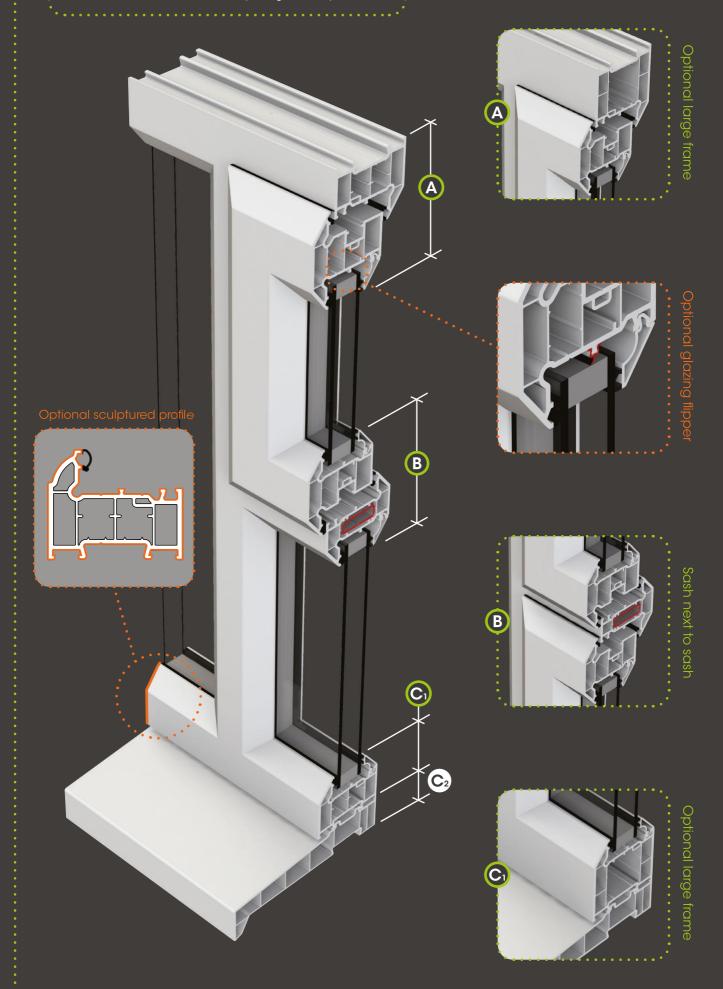

^{*} externally beaded options are also available and feature the same sightlines

Casement Window

- Sculptured and chamfered suites
- 28mm double and 36mm/40mm triple glazing
- 4 chambered multi-wall profiles
- U-values from 1.2 (DGU) and 0.9 (TGU)
- Patented co-ex gasket

Accreditations











Colour Options

































Additional colours are available to order as specials.

The colours shown in this brochure give an indication only.



Product	Dim. A
Small frame & sash L#W011 & L#W031	104mm
Large frame & sash L#W016 & L#W031	124mm

Product	Dim. B
Transom & sash L#W022 & L#W031	114mm
Int. transom & sash L#W027 & L#W031	134mm
Transom & 2 x sash L#W021 & 2 x L#W031	161mm
Int. transom & 2 x sash L#W026 & 2 x L#W031	181mm

Product	Dim. C ₁
Small frame L#W011	57mm
Large frame L#W016	77mm

Product	Dim. C2
85, 150, 165, 180 cills LSL085, LSL150, LCL165, LSL180	30mm

[#] Replace notation with (S) for sculptured suite and (C) for chamfered suite.

Liniar specification guide

The Liniar Specification Guide is an A4-size, 234-page, full colour guide to specifying energy efficient PVCu windows and doors.

Covering the full range of lead-free Liniar products including casement windows, the Specification Guide includes full product charts, U-values and dimensions, accreditations, safety information and a range of case studies.

To view an online copy of the Liniar Specification Guide and to order your free copy visit :

www.liniar.co.uk/specification-guide

Flamstead House Denby Hall Business Park Denby Derbyshire DE5 8JX Tel: +44 (0)1332 883900 Fax: +44 (0)1332 883901 <u>Email</u>: sales@liniar.co.uk

